





# ACT-VCC-2000-AC AIR CONDITIONER

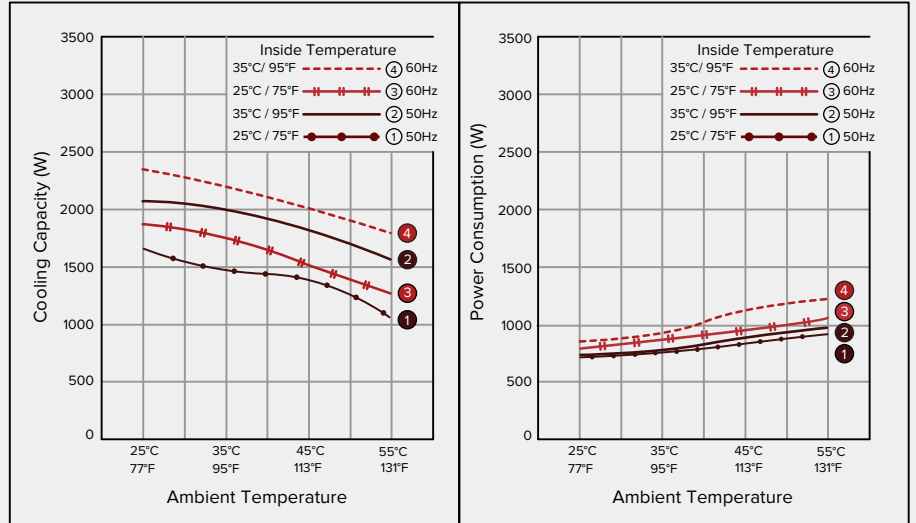

## QUICK FACTS

- 2000W Heat Rejection Capability
- IP55 Rating
- 10 Year Performance Life
- LED Control Panel

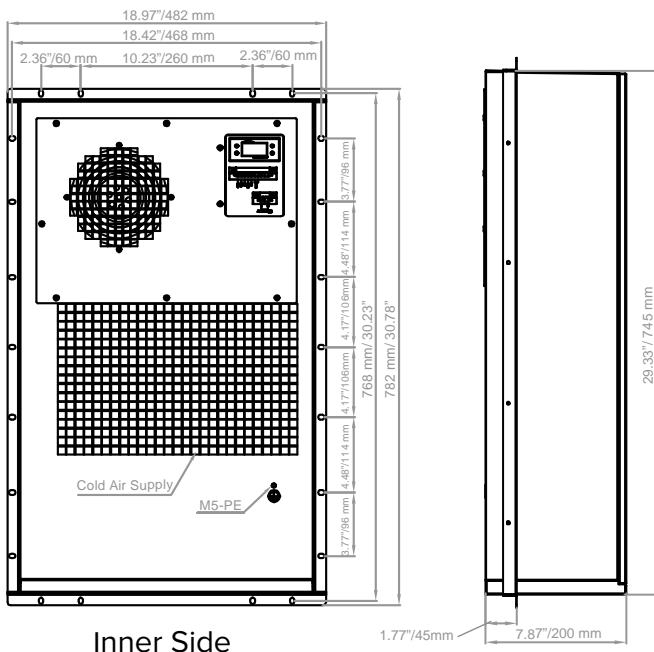

EASY ONLINE ORDERING





ENCLOSURE COOLER SELECTION TOOL

# IDEAL APPLICATIONS



## FIGURE 1 ENCLOSURE MOUNTING


Mounting interface with enclosure door.

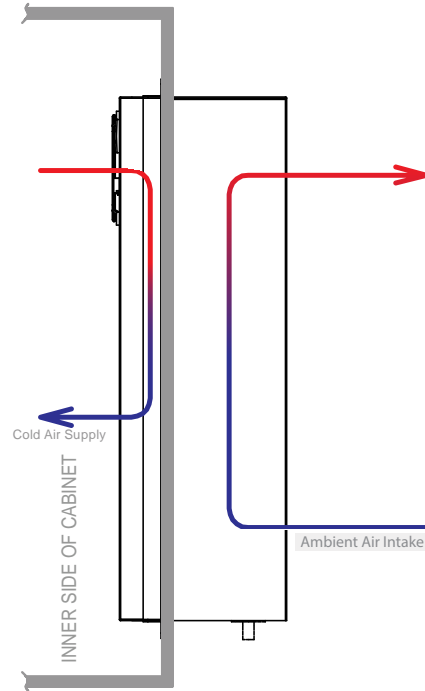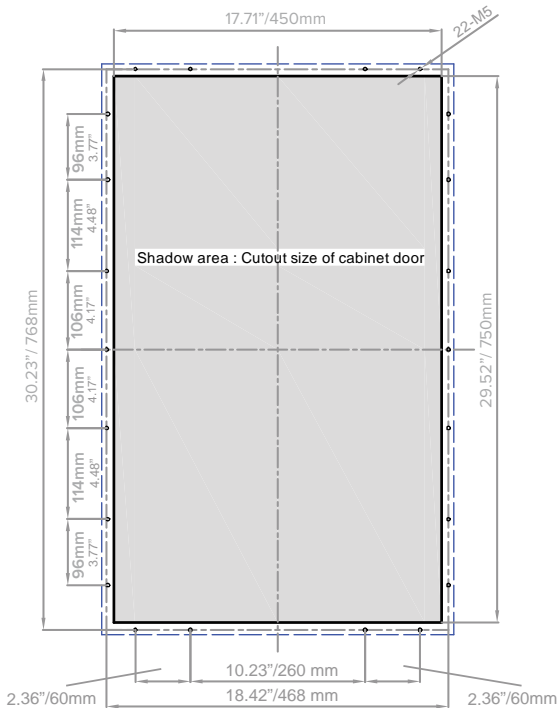

AIR FLOW DIAGRAM

## FIGURE 2 SPECIFICATIONS

Rated Voltage	220-240VAC ~ 50/60Hz
Cooling Capacity (50/60Hz)	2000/2200W @ 35°C/35°C (6800 BTU/hr) (95°F/95°F)
Rated Power Consumption (50/60Hz)	800/900W @ 35°C (95°F)
Rated Current (50/60Hz)	3.5A / 3.9A @ 35°C (95°F)
EER (50/60Hz)	2.5 / 2.4
Internal Air Circulation Rate (50/60Hz)	500 m <sup>3</sup> /hr (294CFM)
Display	LED
Heater	1000W (3400 BTU/hr) * CUSTOM ORDER OPTION
Operating Temperature Range	-15°C - +55°C (5°F - 131°F)
Max. Noise Level	65dB (A) @ 1.0 yard/meter away
Seal Rating	IP55- between external and internal interface
Net Weight	32kg (71 pounds)
Outer Dimensions (H x W x D)	745mm x 445mm x 200mm 29.33" x 17.52" x 7.87"
Refrigerant Type	R134a
Surface Treatment	Powder Coated Steel: Dark Grey Ral 7043
Warranty	12 Months, Expected Lifetime 10 years
Mounting Options	Designed for door mounting, but can mount to side or back walls if accessible



USE SMARTPHONE CAMERA TO SCAN QR CODE FOR INSTALL MANUAL

### QUESTIONS?

CALL: 717-295-6061

EMAIL: ECSALES@1-ACT.COM