



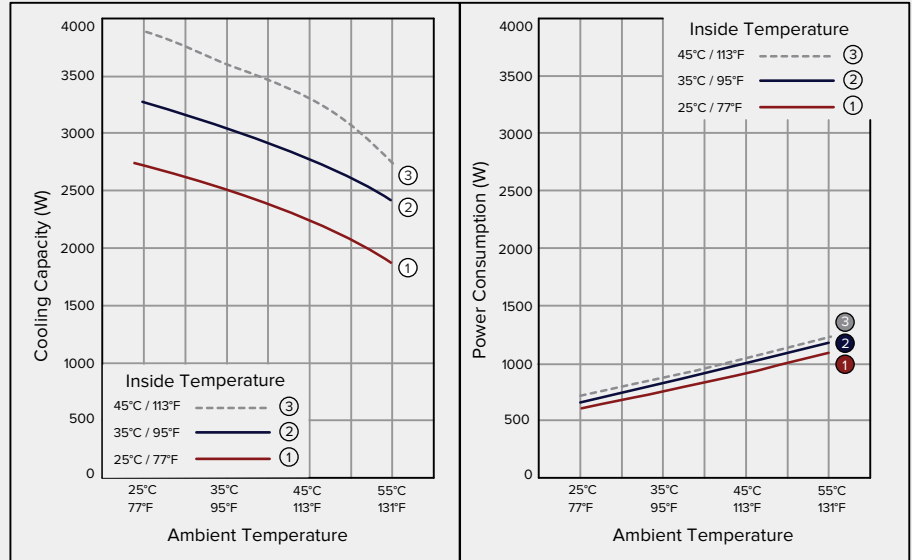


ACT-VCC-3000 WATT DC AIR CONDITIONER


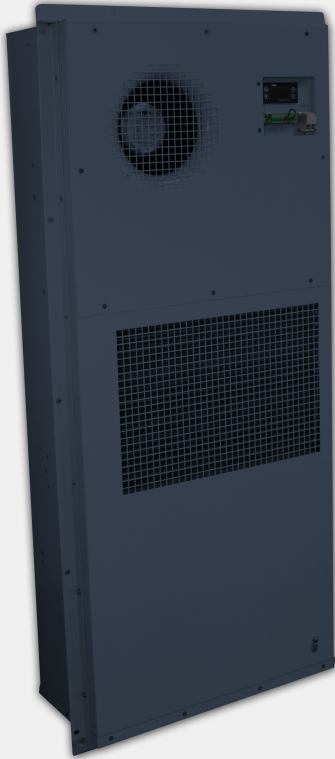


QUICK FACTS

- 3000W Heat Rejection Capability
- IP55 Rating
- 10 Year Performance Life
- LED Control Panel

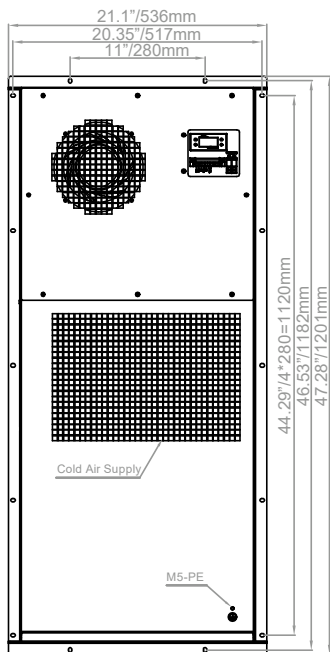

Inner Side

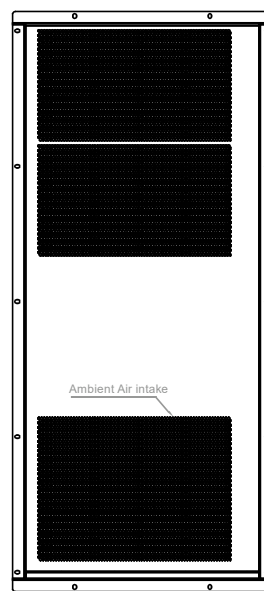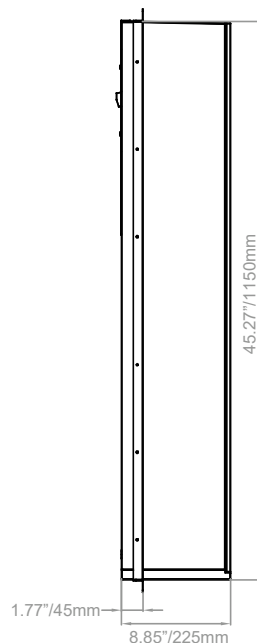


Ambient Side



EASY ONLINE ORDERING



ENCLOSURE COOLER
SELECTION TOOL

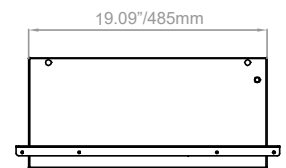



Top View

IDEAL APPLICATIONS



FIGURE 1 ENCLOSURE MOUNTING

Mounting interface with enclosure door.

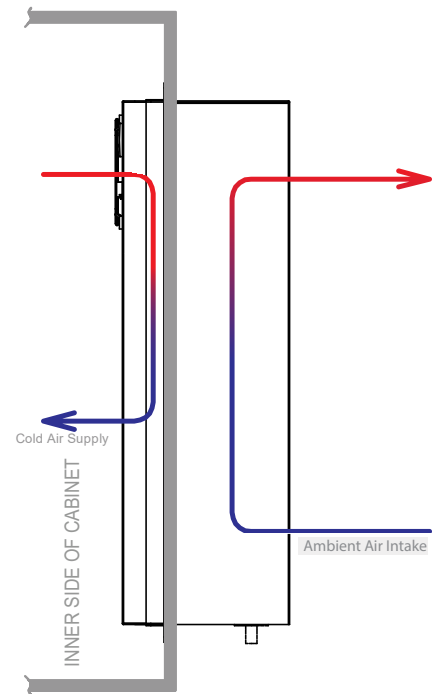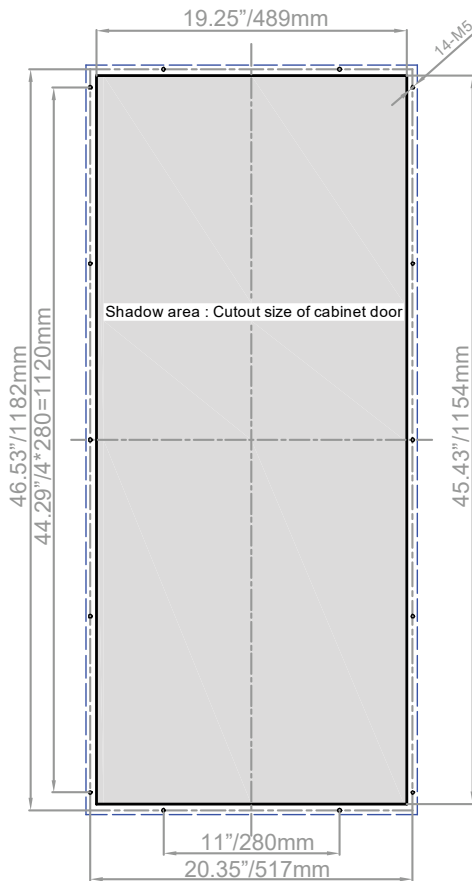


AIR FLOW DIAGRAM

FIGURE 2 SPECIFICATIONS

Rated Voltage	-48 V*
Cooling Capacity	3000W @ 35°C/35°C (1000 BTU/hr) (95°F/95°F)
Related Power Consumption	900W @ 35°C (95°F)
Rated Current	18.8 A @ 35°C (95°F)
EER	3.3
Internal Air Circulation Rate	800 m³/hr (470 CFM)
Display	LED
Heater	N/A
Operating Temperature Range	-15°C - +55°C (5°F - 131°F)
Max. Noise Level	65dB (A) @ 1.0m away
Seal Rating	IP55- between external and internal interface
Net Weight	47 kg (104 pounds)
Outer Dimensions (H x W x D)	1150mm x 485mm x 225mm 45.30" x 19.09" x 8.86"
Refrigerant Type	R134a
Surface Treatment	Powder Coated Steel: Dark Grey Ral 7043
Warranty	12 Months, Expected Lifetime 10 years

Mounting Options: Designed for door mounting, but can mount to side or back walls if accessible

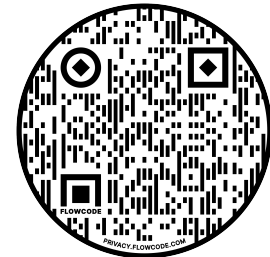

USE SMARTPHONE CAMERA TO SCAN QR
CODE FOR INSTALL MANUAL

*Note:

DC units are wired for **Negative 48** Volt connection. Ensure that positive terminal is connected to Pin 9, "RTN", and Negative terminal is connected to Pin 10, "-48"

QUESTIONS?

CALL: 717-295-6061

EMAIL: ECSALES@1-ACT.COM