





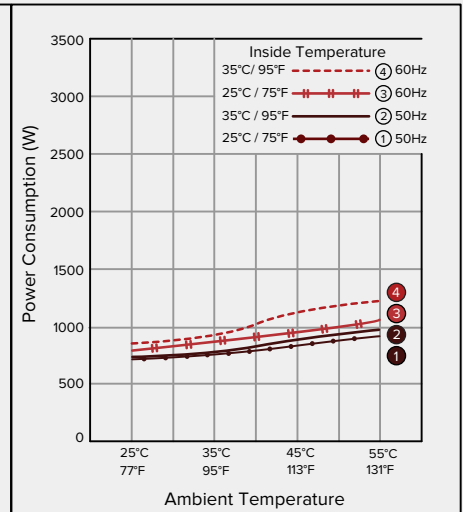


ACT-VCC-2000-AC AIR CONDITIONER

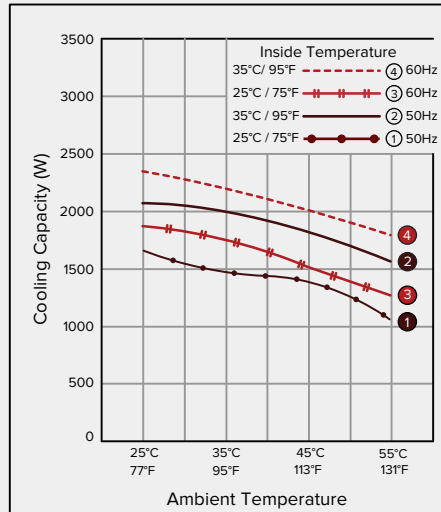

QUICK FACTS

- 2000W Heat Rejection Capability
- NEMA 4 & IP55 Rating
- 10 Year Performance Life
- LED Control Panel

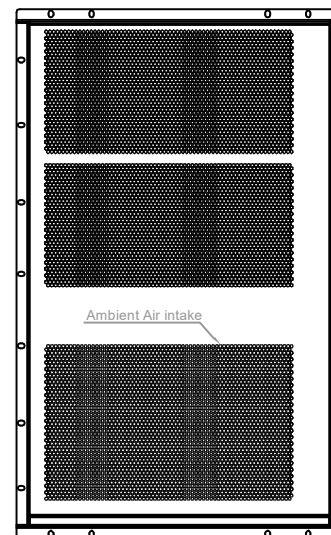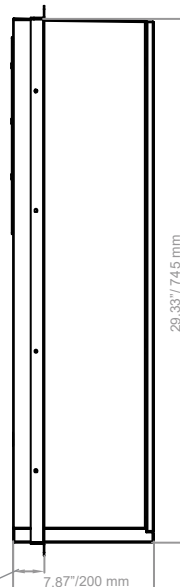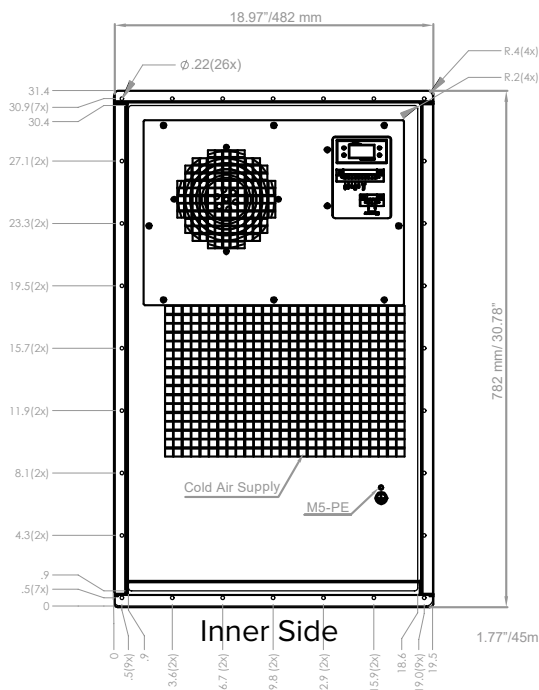


Ambient Side



EASY ONLINE ORDERING



ENCLOSURE COOLER SELECTION TOOL

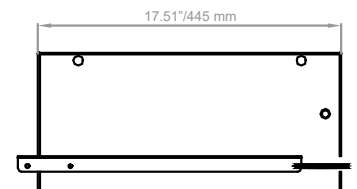



Top View

IDEAL APPLICATIONS



FIGURE 1 ENCLOSURE MOUNTING

Mounting interface with enclosure door.

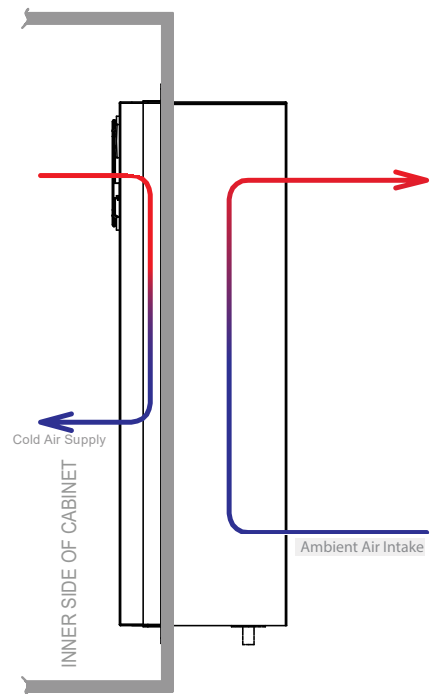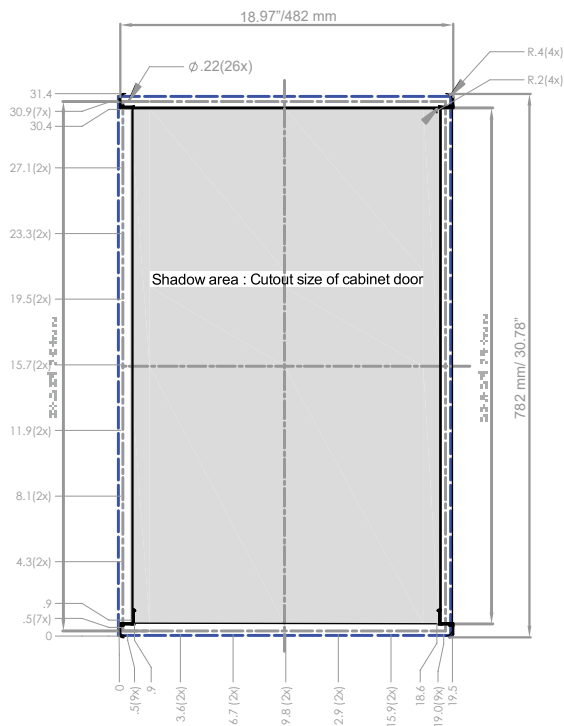

AIR FLOW DIAGRAM

FIGURE 2 SPECIFICATIONS

Rated Voltage	220-240VAC ~ 50/60Hz
Cooling Capacity (50/60Hz)	2000/2200W @ 35°C/35°C (6800 BTU/hr) (95°F/95°F)
Rated Power Consumption (50/60Hz)	800/900W @ 35°C (95°F)
Rated Current (50/60Hz)	3.5A / 3.9A @ 35°C (95°F)
EER (50/60Hz)	2.5 / 2.4
Internal Air Circulation Rate (50/60Hz)	500 m ³ /hr (294CFM)
Display	LED
Heater	1000W (3400 BTU/hr) * CUSTOM ORDER OPTION
Operating Temperature Range	-15°C - +55°C (5°F - 131°F)
Max. Noise Level	65dB (A) @ 1.0 yard/meter away
Seal Rating	IP55- between external and internal interface
Net Weight	32kg (71 pounds)
Outer Dimensions (H x W x D)	745mm x 445mm x 200mm 29.33" x 17.52" x 7.87"
Refrigerant Type	R134a
Surface Treatment	Powder Coated Steel: Dark Grey Ral 7043
Warranty	12 Months, Expected Lifetime 10 years
Mounting Options	Designed for door mounting, but can mount to side or back walls if accessible



QUESTIONS?

CALL: 717-295-6061

EMAIL: ECSALES@1-ACT.COM